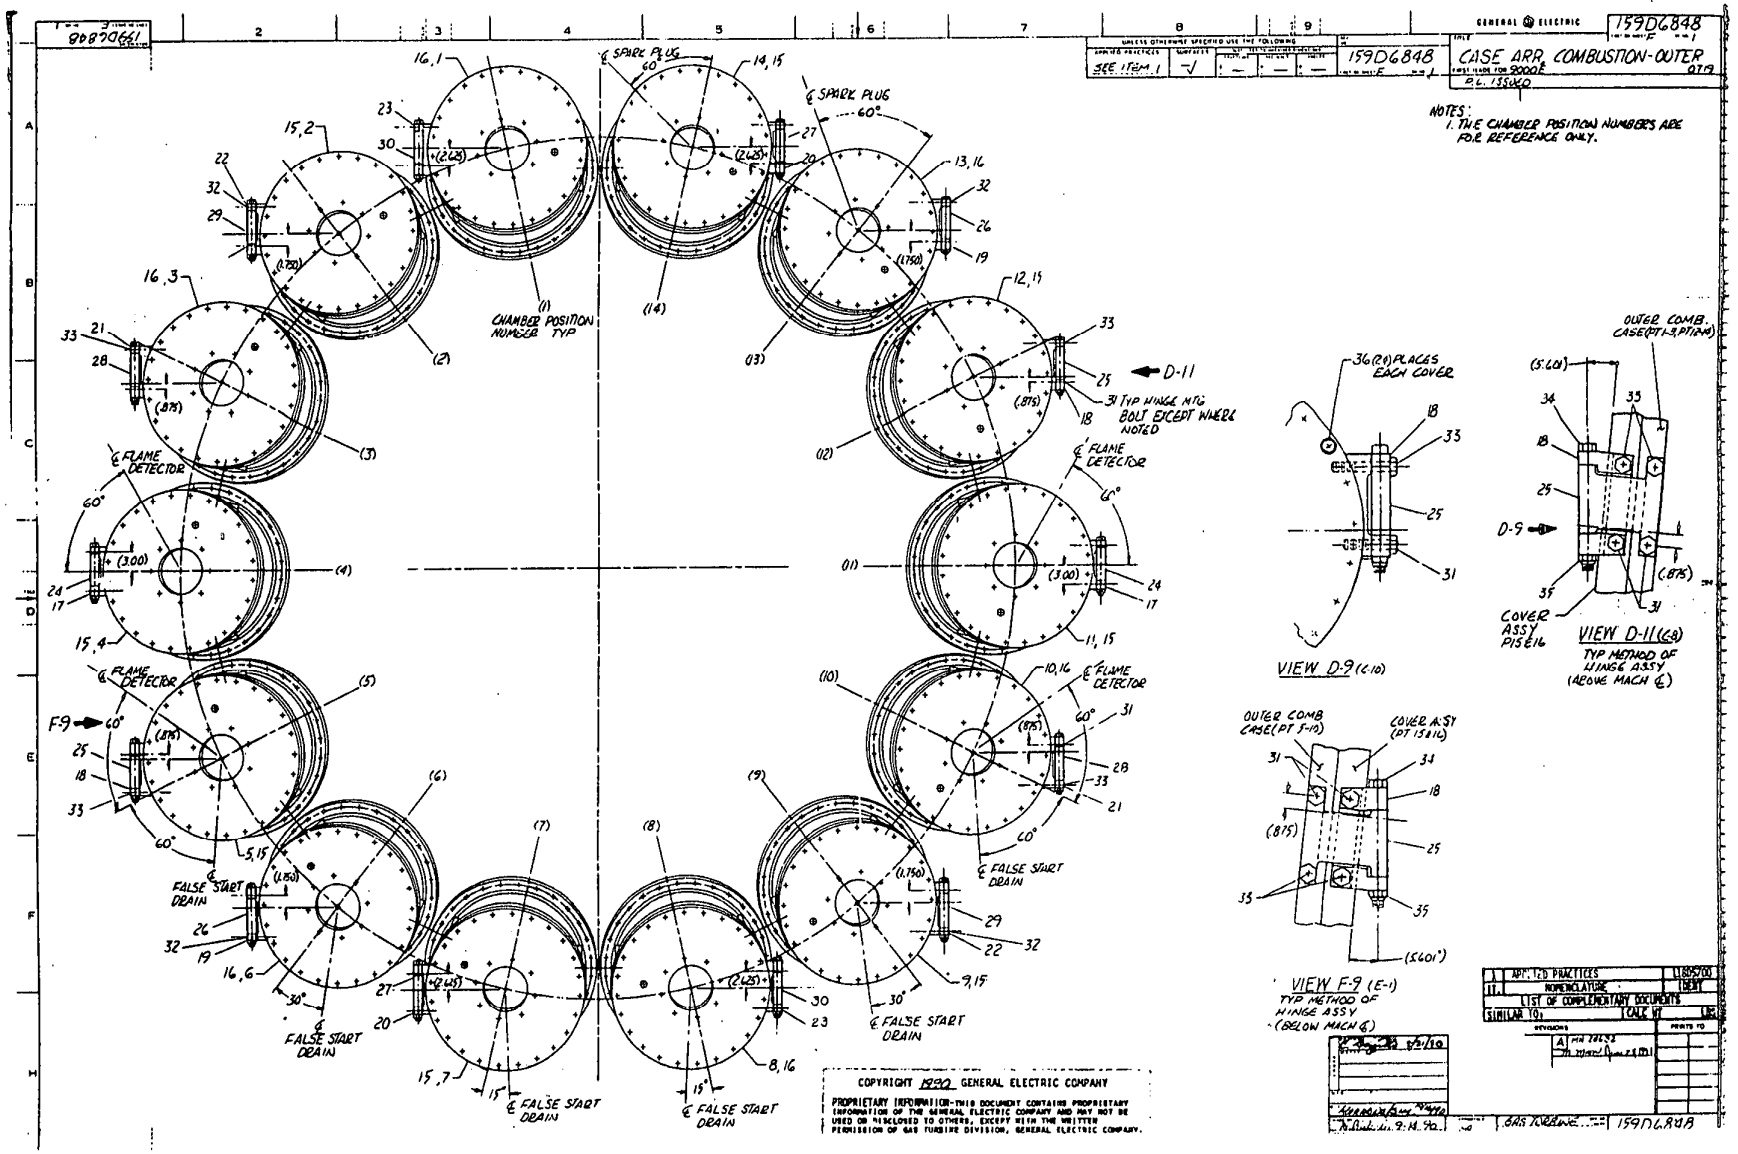
159D6848
GENERAL ELECTRIC
CASE ARR, COMBUSTION-OUTER
NOTES:
1. THE CHAMBER POSITION NUMBERS ARE FOR REFERENCE ONLY.
SPARK PLUG
FLAME DETECTOR
FALSE START DRAIN
(1) CHAMBER POSITION NUMBER TYP
D-11
31 TYP HINGE MTG BOLT EXCEPT WHERE NOTED
36(24) PLACES EACH COVER
VIEW D-9 (C-10)
OUTER COMB. CASE(PT 1-9 PTS/AS)
COVER ASSY PIS/16
VIEW D-11(C-8)
TYP METHOD OF HINGE ASSY (ABOVE MACH ℄)
OUTER COMB CASE(PT 5-10)
COVER A:SY (PT 15/16)
VIEW F-9 (E-1)
TYP METHOD OF HINGE ASSY (BELOW MACH ℄)
COPYRIGHT 1990 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION-THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF THE GENERAL ELECTRIC COMPANY AND MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE WRITTEN PERMISSION OF GAS TURBINE DIVISION, GENERAL ELECTRIC COMPANY.